


DIGITUS Professional - Patch cable

RJ-45 (M) to RJ-45 (M) - 3 m - SFTP - PiMF - CAT 6 - IEEE 802.3 - booted - halogen-free - snagless - stranded - blue (pack of 10)

Group	Cables & Adapters
Manufacturer	DIGITUS
Manufacturer item no.	DK-1644-030-B-10
EAN/UPC	4016032441854

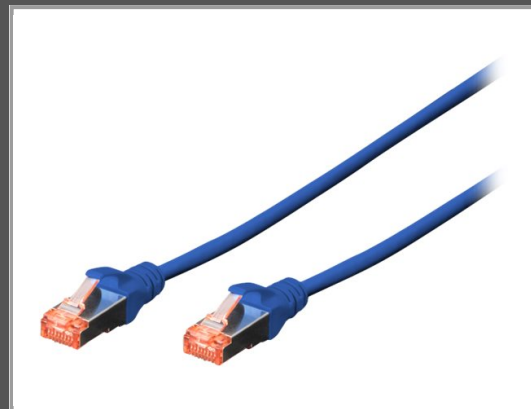

Description

The DIGITUS Category 6 Class E patch cables are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS patch cables are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6, because of the transparent red colored connector.

Main features

Product Description	DIGITUS Professional patch cable - 3 m - blue
Type	Patch cable - CAT 6 - IEEE 802.3
Packaged Quantity	10 (specifications are for single item)
Technology	SFTP, PiMF
Shielding Material	Metal foil with braid
Wires per Cable	8 wires
Features	Booted, halogen-free, snagless, stranded, PoE+ Ready, strain relief, length indication, kink protection, bare copper conductors, latch protection, red connector, poly bag package
Length	3 m
Connector	RJ-45 - male
Connector (Second End)	RJ-45 - male
Colour	Blue

Extended details

General

Packaged Quantity	10 (specifications are for single item)
Network Cable Type	Patch cable - CAT 6 - IEEE 802.3
Technology	SFTP, PiMF
Shielding Material	Metal foil with braid
Jacket Material	Low Smoke Zero Halogen (LSZH)

American Wire Gauge (AWG)	27/7
Wires per Cable	8 wires
Pairs per Cable	4 pairs
Plated Connector	Gold
Features	Booted, halogen-free, snagless, stranded, PoE+ Ready, strain relief, length indication, kink protection, bare copper conductors, latch protection, red connector, poly bag package
Length	3 m
Colour	Blue
	Connectivity
Connector	RJ-45 - male
Connector (Second End)	RJ-45 - male
	Miscellaneous
Compliant Standards	IEC 60332-1, ISO/IEC 11801, TIA/EIA-568-B, IEC 61034, EN 50173, ANSI/TIA/EIA 568-C - up to 250 MHz
	Environmental Parameters
Min Operating Temperature	-20 °C
Max Operating Temperature	60 °C

Technical data © 1WorldSync. Subject to technical modifications and errors.